





Order Form Complete Saddle Set

Company:

Contact person / Telephone:

Address:

Postcode / City / Country:

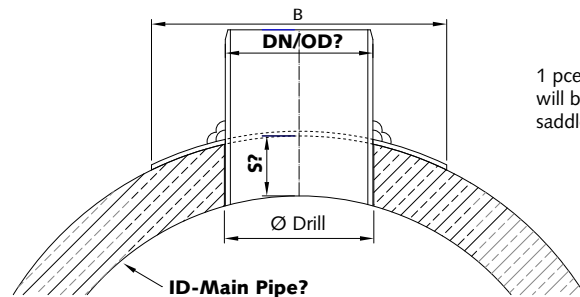

1 pce. of coupler/coupling
will be supplied loose with
saddle set

DN/OD Connection	Please mark					Please fill in		Please fill in the sizes	
	Colour grey	Inlet Socket	HS blue	HS brown	Inlet Socket	Internal diameter Main Pipe mm	S Wall thickness Main Pipe mm	B Outer diameter flange „Standard“	B Outer diameter flange „Special size“
DN/OD 110		DS			DS		S =	250 x 250 mm	
DN/OD 125		DS			DS		S =	300 x 300 mm	
DN/OD 160		DS			VS		S =	320 x 320 mm	
DN/OD 200		DS			VS		S =	360 x 360 mm	
DN/OD 250		DS			DS		S =	400 x 400 mm	
DN/OD 315		DS			DS		S =	500 x 500 mm	
DN/OD 400		VPC 415			VPC 415		S =	600 x 600 mm	
DN/OD 500		VPC 520			VPC 520		S =	700 x 700 mm	
DN/OD 630 ¹		VPC 660			VPC 660		S =	900 x 900 mm	
DN/OD 710 ¹		VPC 730			VPC 730		S =	1000 x 1000 mm	

¹ Installation by two Funke service technicians. Please enquire for this separately.

Special production – Return not possible!

DN/OD Connection	Recommendation: Drill Hole in mm	Quantity of included sets (Glue, Hardener, Primer)
DN/OD 110	112	1
DN/OD 125	127	1
DN/OD 160	162	1
DN/OD 200	200 (212)	1
DN/OD 250	257	2
DN/OD 315	320	3
DN/OD 400	405–420	4
DN/OD 500	505–520	5
DN/OD 630	650	6
DN/OD 710	730	7

Accessories:

Saddle clamp for connection in the diameters DN/OD 110 - 250	
Saddle clamp for connection in the diameters DN/OD 315 - 500	
Tangential spanner for VPC DN/OD 400 - 710	

NOTE:

depending on the drill size / connection the static of the main pipe has to be checked /considered.

Fax: +49 2388 3071-7550

Send